


## 表面安装快恢复整流二极管

反向电压 1000 V  
正向电流 1.0 A

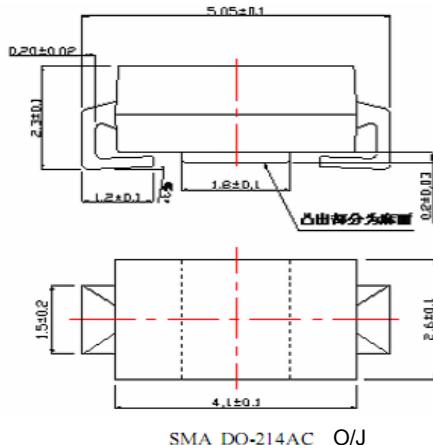

## Surface Mount Fast Recover Rectifier

Reverse Voltage 1000 V  
Forward Current 1.0 A

特征 Features

- 低的反向漏电流 Low reverse leakage
- 较强的正向浪涌承受能力 High forward surge capability
- 高温焊接保证 High temperature soldering guaranteed:  
250°C/10 秒 seconds at terminals

机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded plastic body
- 端子: 焊料被镀 Terminals: Solder plated
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

**极限值和温度特性** TA = 25°C 除非另有规定。

**Maximum Ratings & Thermal Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	RS1M	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	1000	V
最大均方根电压 Maximum RMS voltage	V <sub>RMS</sub>	700	V
最大直流阻断电压 Maximum DC blocking voltage	V <sub>DC</sub>	1000	V
最大正向平均整流电流 Maximum average forward rectified current	I <sub>F(AV)</sub>	1.0	A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I <sub>FSM</sub>	30	A
最大反向峰值电流 @TA = 75°C Maximum peak reverse current full cycle	I <sub>R(AV)</sub>	30	μA
典型热阻 Typical thermal resistance	R <sub>θJA</sub>	55	°C/W
工作结温和存储温度 Operating junction and storage temperature range	T <sub>j</sub> , T <sub>TSG</sub>	-50 --- +150	°C

**电特性** TA = 25°C 除非另有规定。

**Electrical Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	RS1M	单位 Unit
最大正向电压 Maximum forward voltage	I <sub>F</sub> = 1.0A	V <sub>F</sub>	1.3
最大反向电流 Maximum reverse current	TA= 25°C	I <sub>R</sub>	5.0
最大反向恢复时间 MAX. Reverse Recovery Time	I <sub>F</sub> =0.5A I <sub>R</sub> =1.0A I <sub>RR</sub> =0.25A	trr	nS
典型结电容 V <sub>R</sub> = 4.0V, f = 1MHz Type junction capacitance	C <sub>j</sub>	15	pF

## 特性曲线 Characteristic Curves

