

US1M

表面安装高效率整流二极管


反向电压 1000 V

正向电流 1.0 A

Surface Mount High-Efficiency Rectifier

Reverse Voltage 1000 V

Forward Current 1.0 A

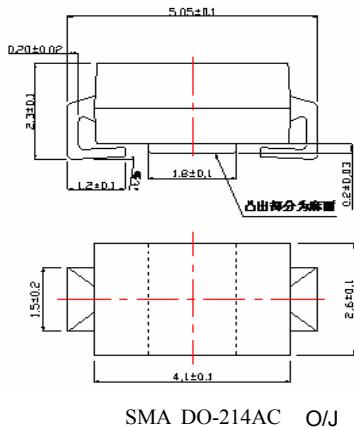

特征 Features

- 低的反向漏电流 Low reverse leakage
- 较强的正向浪涌承受能力 High forward surge capability
- 高温焊接保证 High temperature soldering guaranteed:
250°C/10 秒 seconds at terminals

机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded plastic body
- 端子: 焊料被镀 Terminals: Solder plated
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	US1M	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V _{RRM}	1000	V
最大均方根电压 Maximum RMS voltage	V _{RMS}	700	V
最大直流阻断电压 Maximum DC blocking voltage	V _{DC}	1000	V
最大正向平均整流电流 Maximum average forward rectified current	I _{F(AV)}	1.0	A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I _{FSM}	30	A
最大反向峰值电流 @TA = 75°C Maximum peak reverse current full cycle	I _{R(AV)}	30	μA
典型热阻 Typical thermal resistance	R _{θJA}	50	°C/W
工作结温和存储温度 Operating junction and storage temperature range	T _j , T _{TSG}	-50 --- +150	°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	US1M	单位 Unit
最大正向电压 Maximum forward voltage	I _F = 1.0A	V _F	1.7
最大反向电流 Maximum reverse current	TA= 25°C	I _R	5.0
最大反向恢复时间 MAX. Reverse Recovery Time	I _F =0.5A I _R =1.0A I _{RR} =0.25A	trr	nS
典型结电容 V _R = 4.0V, f = 1MHz Type junction capacitance	C _j	15	pF

特性曲线 Characteristic Curves

